

XianFeng

Screening machine supplier

**High Capacity,
Heavy-Duty,
Customization.**

Screen Machine XFZ Series



XFZ has a wealth of optional configurations to meet your material characteristics. Every customer is unique and every material is unique.



Wire Screen



Composite



Stick Screen



Punch Screen

XFZ Features


- Simple structure, less downtime.
- Heavy-duty, oilable bearing motor.
- Negative 10° to 30° screen angle.
- 6-stage separation at the same time.
- Mesh size 2~60 mesh (0.25mm ~ 10mm).
- Feeding capacity up to 100 cubic meter per hour.

Free Material Test

- Professional sales staff quickly understand your needs.
- Get recommended product solutions and quotations within 24 hours.
- Free material testing, providing test data and videos.
- More than 500 customer applications prove the correlation between theoretical calculations and actual performance.

To find Affordable screening machine visit

www.cnxfzd.com

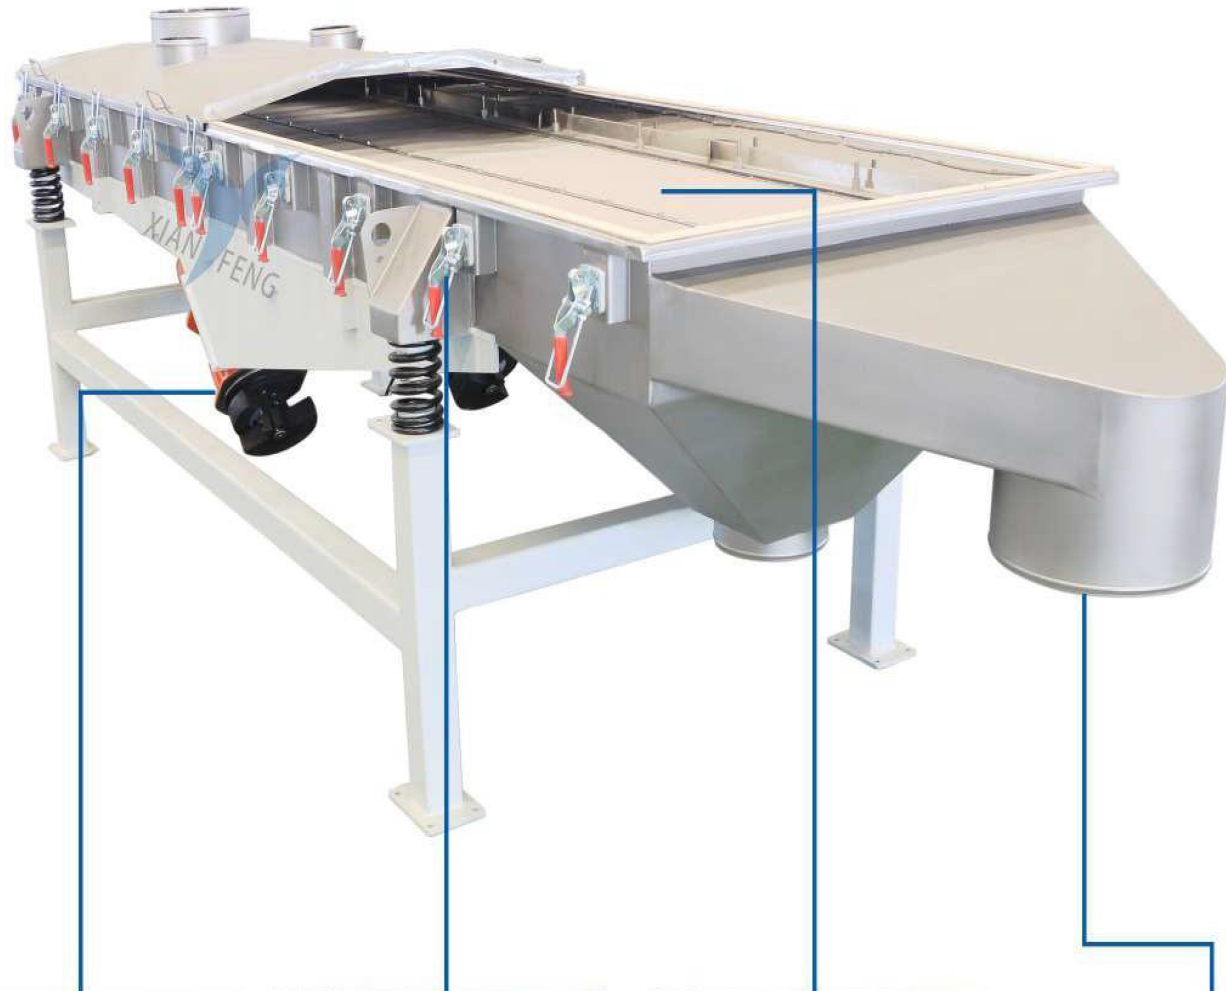

Heavy-duty Motor

Italy Oli brand motor, with oil injection design, 7*24 hours operation, reducing down-time.



Quick Access

The quick release clamp allows users to quickly open the dust cover for screen maintenance and replacement, saving time.




Cleaning System

XFZ uses 70% rebound balls and a heavy-duty ball plate. The bouncing balls number per grid has reached 12, material blinding holes is non-existent.



Customization

The outlets shape and height can be customized to fully match the upstream and downstream equipments and meet the customer's on-site layout requirements.

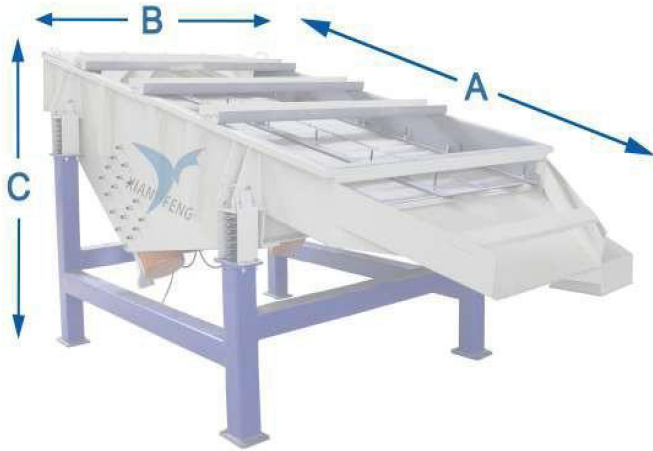

A = Installation Length

B = Installation Width

C = Installation Height

XFZ Models List

Model NO.	Motor		Overall Dimension						Shipping Weight	
			A		B		C			
	Kw	Hp	MM	IN	MM	IN	MM	IN	KG	LB
XFZ0820-1	1.1	1.5	2400	94	1200	47	1050	41	650	1430
XFZ0820-2	1.1	1.5	2400	94	1200	47	1150	45	700	1540
XFZ0820-3	1.1	1.5	2400	94	1200	47	1250	49	750	1650
XFZ1020-1	1.1	1.5	2400	94	1400	55	1250	49	750	1650
XFZ1020-2	1.1	1.5	2400	94	1400	55	1350	53	870	1914
XFZ1020-3	1.1	1.5	2400	94	1400	55	1450	57	930	2046
XFZ1030-1	1.5	2.1	3400	134	1400	55	1250	49	800	1760
XFZ1030-2	1.5	2.1	3400	134	1400	55	1350	53	870	1914
XFZ1030-3	1.5	2.1	3400	134	1400	55	1450	57	940	2068
XFZ1030-4	1.5	2.1	3400	134	1400	55	1550	61	1010	2222
XFZ1030-5	1.5	2.1	3400	134	1400	55	1650	65	1080	2376
XFZ1530-1	3	4.1	3400	134	1840	72	1800	71	1700	3740
XFZ1530-2	3	4.2	3400	134	1840	72	1900	75	1800	3960
XFZ1530-3	3	4.3	3400	134	1840	72	2000	79	1900	4180
XFZ2040-1	4.7	6.4	3400	134	2130	84	2400	94	2980	6556
XFZ2040-2	4.7	6.5	4400	173	2130	84	2500	98	3100	6820
XFZ2040-3	4.7	6.6	4400	173	2130	84	2600	102	3200	7040
XFZ2050-1	5.8	7.9	4400	173	2130	84	2840	112	4700	10340
XFZ2050-2	5.8	7.1	4400	173	2130	84	2940	116	4800	10560
XFZ2050-3	5.8	7.1	5300	209	2130	84	3040	120	4900	10780